



### LOAD DIAGRAM

To the left of the curve the indicated loads can be handled with any loader function provided that the positions of the booms are optimized from a force point of view

- 1) Special hook in inner hook attachment
- 2) Standard hook on 2nd extension (Standard hook 12 t)

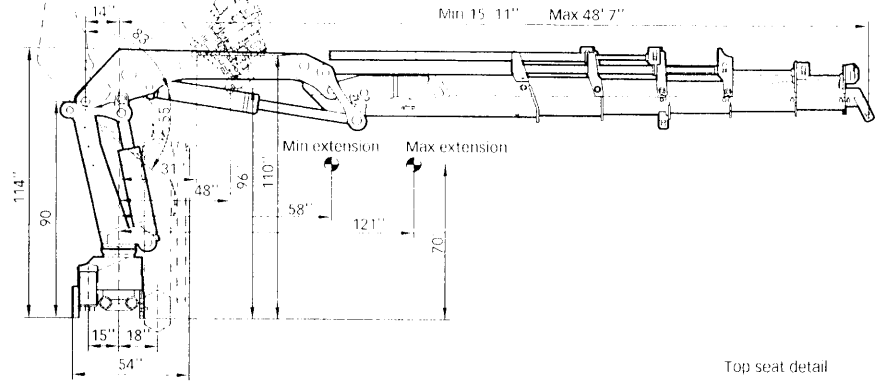

Center of gravity (without support legs)

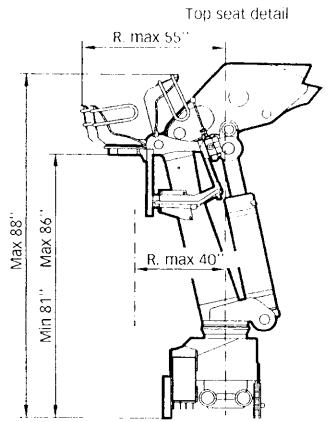

	185"	276"
A	86 1/4"	87 6/8"
B	184 5/8"	276"

	185"	276"
A	87 5/8"	89 1/8"
B	186"	277 3/8"

