


76063

# Hiab XS 422 Basic data

Technical data	EP-4 CLX	EP-5 HiPro	E-6 HiPro	E-8 HiPro
Max. lifting capacity (ft-lbs)	-	278 060	270 680	261 850
Outreach, hydraulic extensions	-	-	-	-
Outreach, manual extensions	0' 0"	0' 0"	66' 3"	75' 6"
Outreach, jib	-	-	85' 0"	-
Outreach / lifting capacity (ft / lbs)	9' 2" / 26 460	10' 2" / 26 460	9' 10" / 26 460	9' 6" / 26 460
	16' 1" / 16 090	16' 1" / 17 200	16' 1" / 16 760	15' 9" / 16 530
	22' 4" / 11 240	22' 4" / 12 130	21' 4" / 12 130	21' 0" / 11 680
	28' 10" / 8 490	28' 10" / 9 040	27' 7" / 8 930	26' 11" / 8 600
	36' 1" / 6 610	36' 1" / 7 050	33' 6" / 7 050	33' 2" / 6 530
	43' 4" / 5 510	43' 4" / 5 780	40' 0" / 5 690	39' 8" / 5 110
	-	50' 6" / 4 940	46' 11" / 4 760	46' 7" / 4 140
	-	-	54' 2" / 4 060	53' 10" / 3 440
	-	-	-	61' 0" / 2 950
	-	-	-	68' 3" / 2 650
Outreach / lifting capacity, with jib (lbs)	-	-	63' 0" / 1,500	-
	-	-	66' 3" / 1,370	-
	-	-	70' 6" / 1,230	-
	-	-	74' 10" / 1,120	-
	-	-	79' 9" / 1,040	-
	-	-	84' 8" / 970	-
Slewing angle	400° - 400°	400° - 400°	400° - 400°	400° - 400°
Height in folded position	99"	99"	95"	98"
Width in folded position	98"	98"	98"	98"
Installation space needed	58"	58"	57"	59"
Weight, "standard" crane without stabilizers (lbs)	-	9,660	10,010	10,670
Weight, stabilizer equipment (lbs)	1,390 - 1,850	1,390 - 1,850	1,390 - 1,850	1,390 - 1,850
Weight, jib (lbs)	-	-	1070	-

### Hiab XS 422 E-8 HiPro

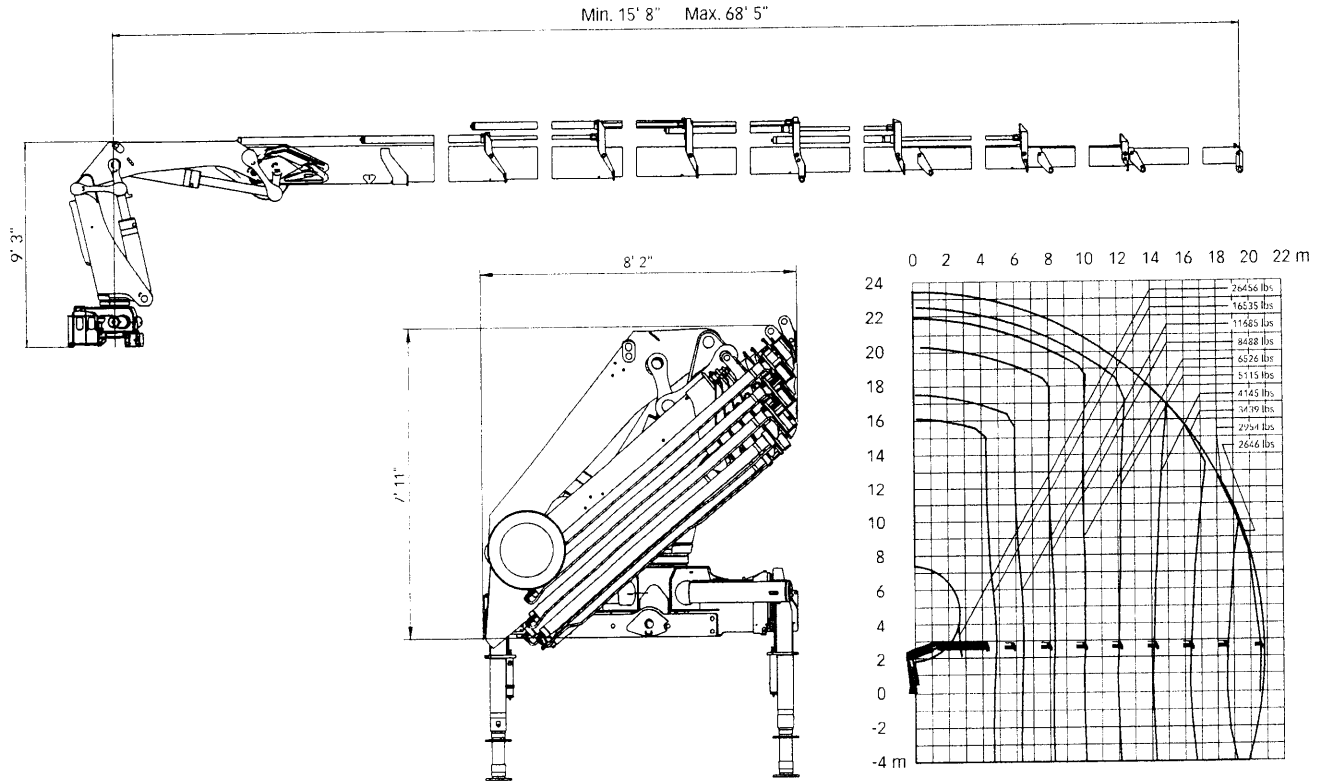

### Hiab XS 422 E-6 HiPro jib 100X-5

